
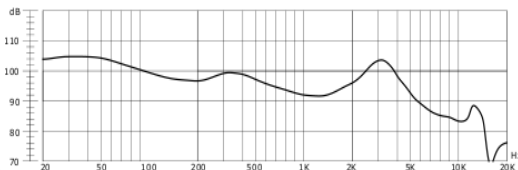


SoniCrest SPEAKER SOUND GENERATORS

HSR08F

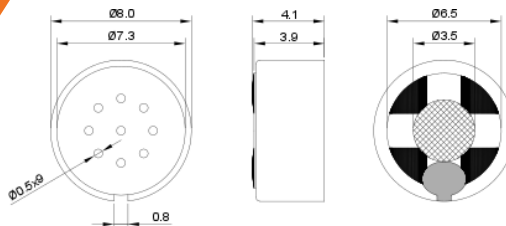

Dimensions

Unit : mm
Tolerance : ± 0.3 mm

Frequency Response

Applied Signal: 1mW, Sine Wave
Based on IEC-R318 Standard

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature (°C)	Storage Temperature (°C)
16 \pm 15%	3	5	92 \pm 3	300 ~ 3400	<5%	-5 ~ +65	-10 ~ +70

HSR08F-16

The specification are only for 16Ω version. Specification for other impedance is available upon request.
*Value applied: 1mW input power, based on IEC-R318 standard.