

# SENER


## Lithium Rechargeable Coin Cells

# ML1220



### Dimensions

Unit : mm  
Tolerance : +/- 0.3mm  
Not in Scale

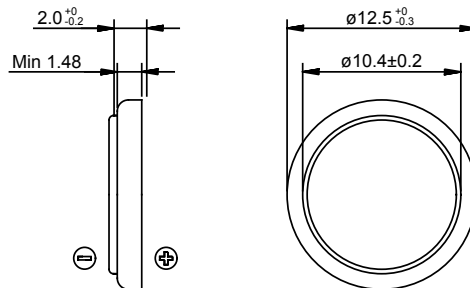

### ■ Lithium/Manganese Dioxide Rechargeable Coin Battery

**Specification** (all data taken at 25°C unless otherwise specified)

Nominal Voltage (V)	*Nominal Capacity (mAh)	Standard Discharge Current (µA)	Service Life (Hours)	Operating Temperature (°C)	Storage Temperature (°C)	Storage Humidity (%)	Weight (g)
3	18	30	≥180	-20 ~ +70	0 ~ +30	40 ~ 75	0.8

\*Under Load 30kΩ Load and 2.0V End-voltage