




SoniCrest SPEAKER SOUND GENERATORS


HSR07A



Dimensions

Unit : mm

Tolerance : ± 0.3 mm

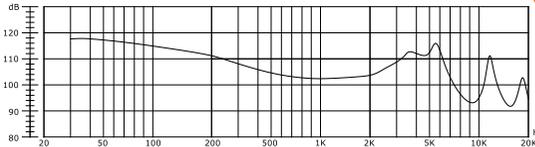

Frequency Response

Applied Signal: 126mV, Sine Wave
Based on IEC-R318 Standard

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature ($^{\circ}$ C)	Storage Temperature ($^{\circ}$ C)
16 \pm 20%	5	10	101.5 \pm 3	50 ~ 5000	<5%	-20 ~ +60	-30 ~ +70

HSR07A-16

The specification are only for 16 Ω version. Specification for other impedance is available upon request.

*Value applied: 126mV input power, based on IEC-R318 standard.