




SoniCrest SPEAKER SOUND GENERATORS


HSR10Y



Dimensions

Unit : mm

Tolerance : ± 0.3 mm

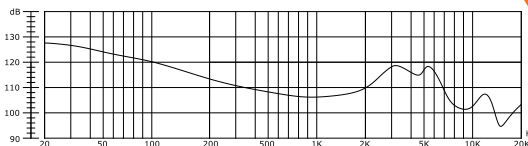

Frequency Response

Applied Signal: 1mW, Sine Wave
Based on IEC-R318 Standard

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature (°C)	Storage Temperature (°C)
32 \pm 15%	2	5	108 \pm 3	100 ~ 5000	<5%	-20 ~ +60	-30 ~ +70

HSR10Y-32

The specification are only for 32 Ω version. Specification for other impedance is available upon request.

*Value applied: 1mW input power, based on IEC-R318 standard.