
## **SoniCrest**

HSB40AQ



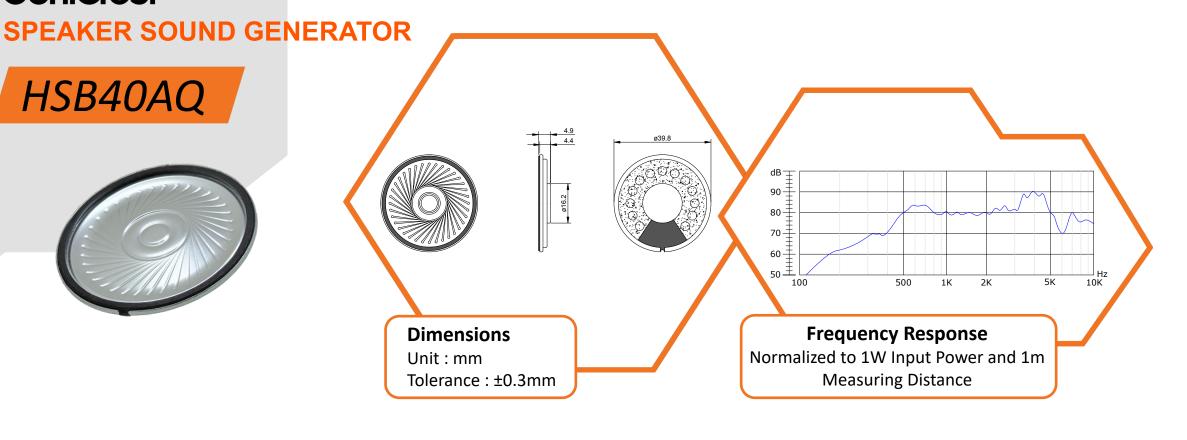

Specification (all data taken at 25°C unless otherwise specified)

Part Number	Coil	Rated	Maximum	*Frequency	*Average Sound	Operating	Storage
	Impedance	Power	Input	Range	Pressure Level	Temperature	Temperature
	(Ω)	(W)	Power (W)	(Hz)	(dB)	(°C)	(°C)
HSB40AQ-4	4 ± 15%	2.0	2.5	600 to 20000	81 ± 3	-20 to +60	-25 to +60

The specification are only for  $4\Omega$  version. Specification for other impedance is available upon request.

<sup>\*</sup>Value normalized to 1W input power and 1m measuring distance.