


- Back Electret Condenser Microphone
- Uni-directional
- Solder joint, wires or connector mounting
- For headsets, wearables, IoT applications


Dimensions

Unit : mm

Tolerance : ± 0.3 mm

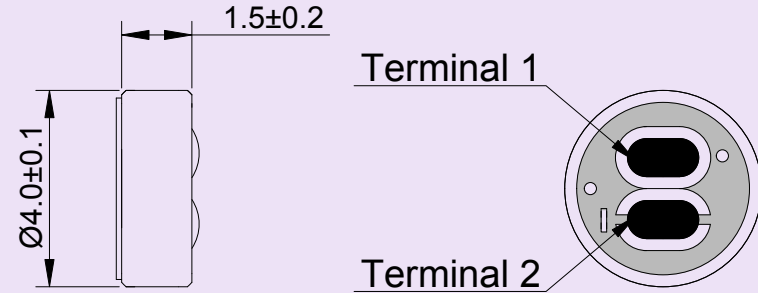

Frequency Response

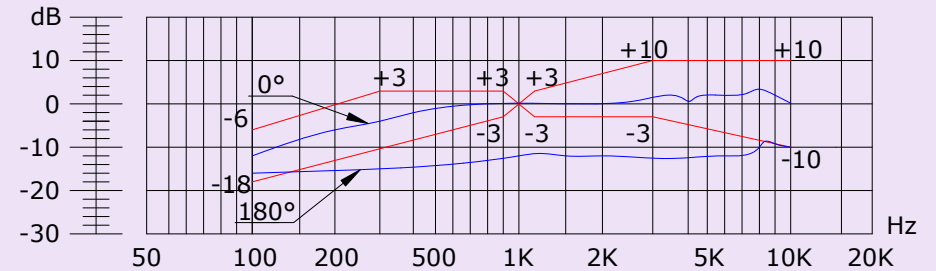

Specification (all data taken at 25°C unless otherwise specified)

Part Number	Directivity	*Sensitivity (dB)	Operating Voltage (V)	Current Consumption (mA)	Frequency Range (Hz)	*S/N Ratio (dB)	Operating Temperature (°C)	Storage Temperature (°C)
HBU0402A-60/463	Uni-Directional	-40 ± 3	1.4 to 5	≤ 0.5	100 to 10000	≥ 58	-40 to +100	-40 to -125

*Condition: 0dB = 1V/Pa, 1KHz