



SoniCrest
SPEAKER SOUND GENERATOR

HSR40N

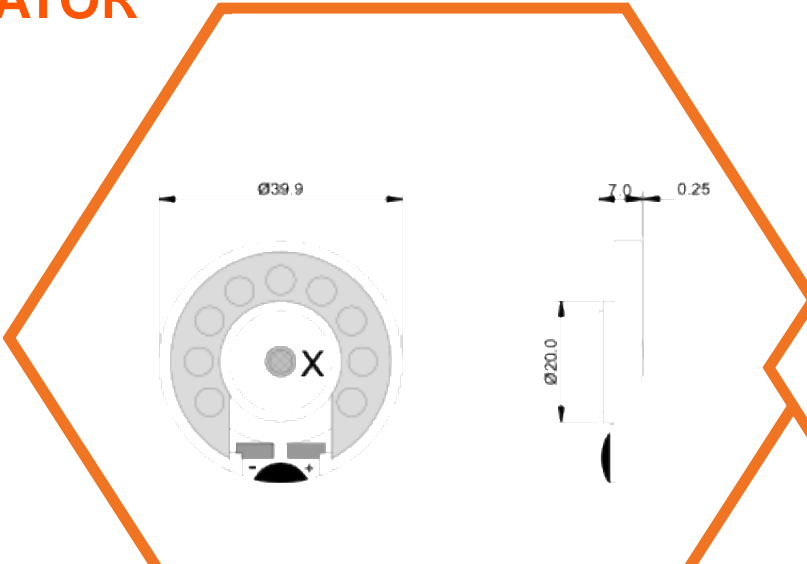

Dimensions
Unit : mm
Tolerance : ±0.3mm

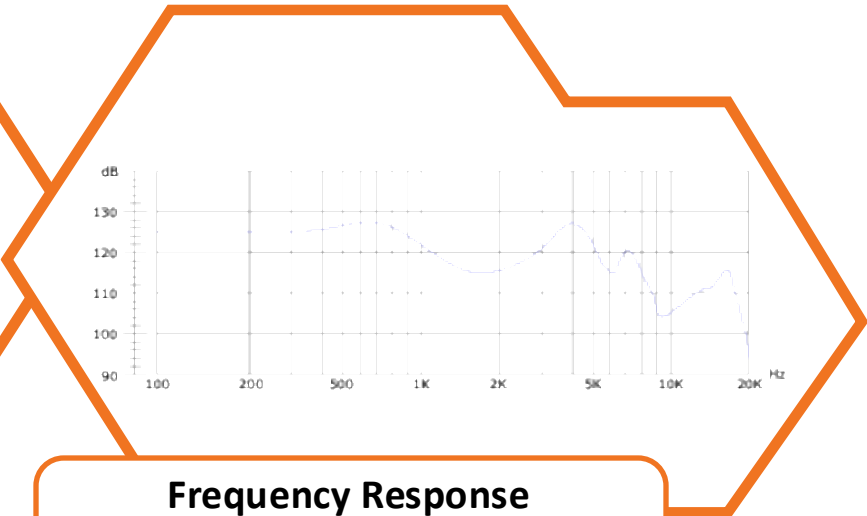

Frequency Response
Applied signal: 447mV, Sine Wave
Based on IEC-R318 standard

Specification (all data taken at 25°C unless otherwise specified)

Part Number	Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Frequency Range (Hz)	*Sound Pressure Level at 1.7KHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
HSR40N-32/1473	32 ± 15%	20	40	100 to 10000	116 ± 3	-20 to +55	-20 to +55

The specification are only for 32Ω version. Specification for other impedance is available upon request.

*Value applied: 447mV input power, based on IEC-R318 standard.