



**SoniCrest**  
**SPEAKER SOUND GENERATOR**

**SBA5476A**

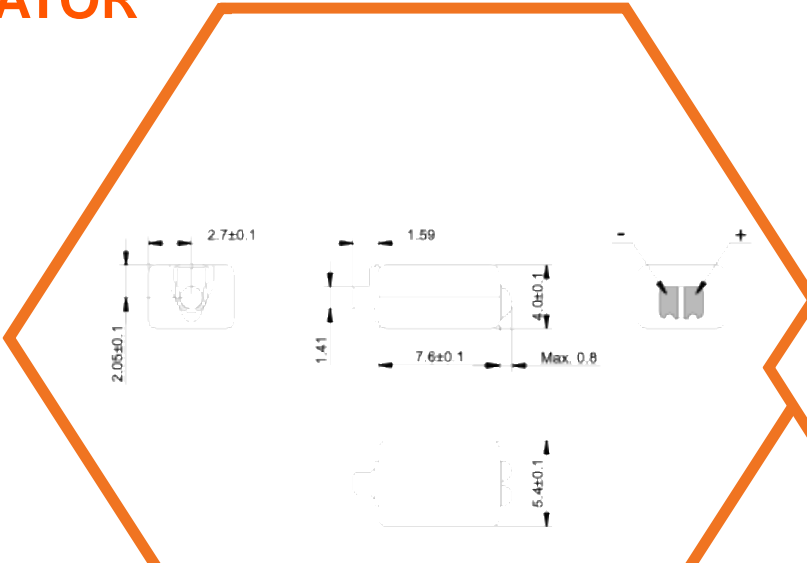

**Dimensions**  
Unit : mm  
Tolerance : ±0.3mm

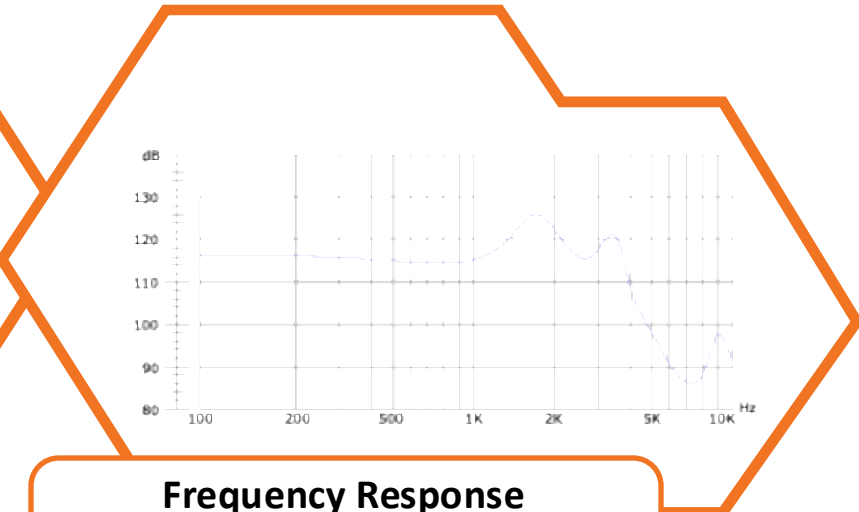

**Frequency Response**  
Applied signal: 125mV, Sine Wave  
Based on IEC-711 standard

Specification (all data taken at 25°C unless otherwise specified)

Part Number	DC Resistance (Ω)	Coil Impedance at 1KHz (Ω)	*Peak Frequency 1 (Hz)	*Peak Frequency 2 (Hz)	*THD at Peak 1 (%)	*Sensitivity at 1KHz (dB)	Storage Temperature (°C)
SBA5476A-10	10 ± 2	23 ± 15%	1800 ± 400	3500 ± 500	≤ 5	116 ± 3	-40 to +63

\*Value applied: 125mV input voltage, based on IEC-711 standard.