



**SoniCrest**  
**SPEAKER SOUND GENERATOR**

**HSM30E**

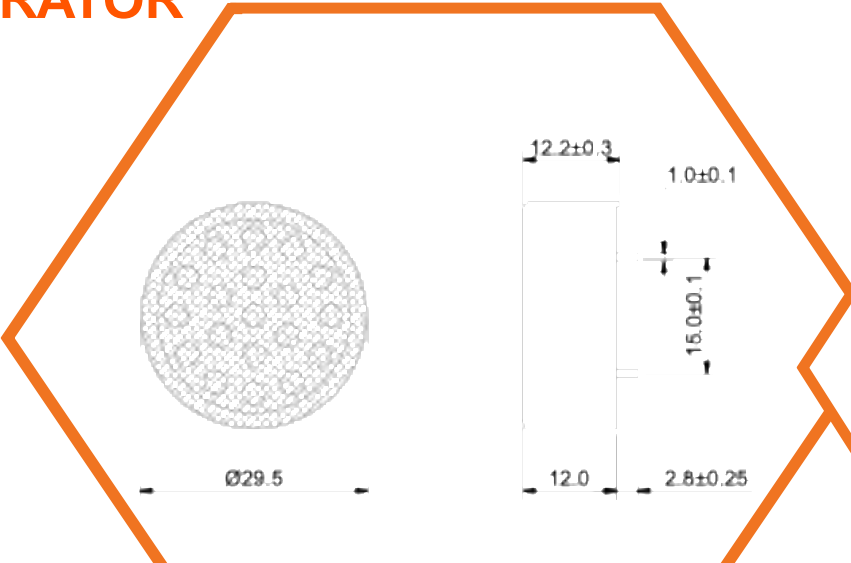

**Dimensions**  
 Unit : mm  
 Tolerance : ±0.3mm

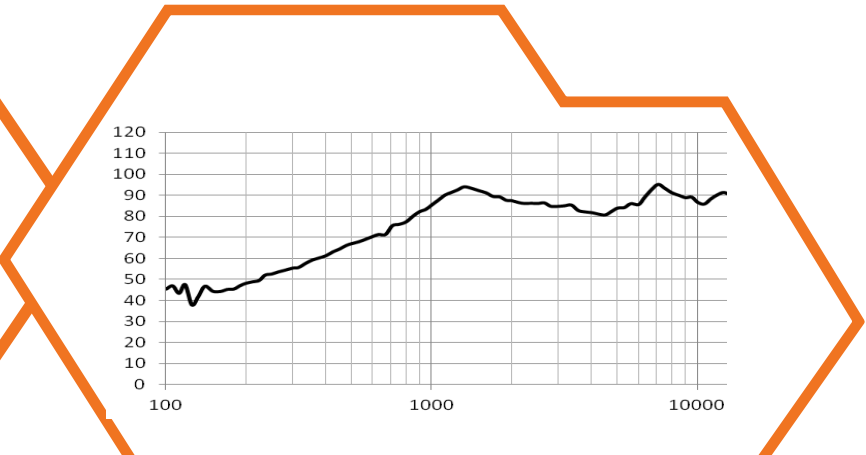

**Frequency Response**  
 Normalized to 0.5W Input Power and  
 0.3m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

| Part Number | Coil Impedance (Ω) | Rated Power (W) | Maximum Input Power (W) | *Frequency Range (Hz) | *Average Sound Pressure Level (dB) | Operating Temperature (°C) | Storage Temperature (°C) |
|-------------|--------------------|-----------------|-------------------------|-----------------------|------------------------------------|----------------------------|--------------------------|
| HSM30E-8    | 8 ± 15%            | 0.8             | 1.0                     | 1200 to 20000         | 87 ± 3                             | -40 to +85                 | -40 to +85               |

The specification are only for 8Ω version. Specification for other impedance is available upon request.  
 \*Value normalized to 0.5W input power and 0.3m measuring distance.