



# SoniCrest

## SPEAKER SOUND GENERATOR

### HSR38A-150/1454

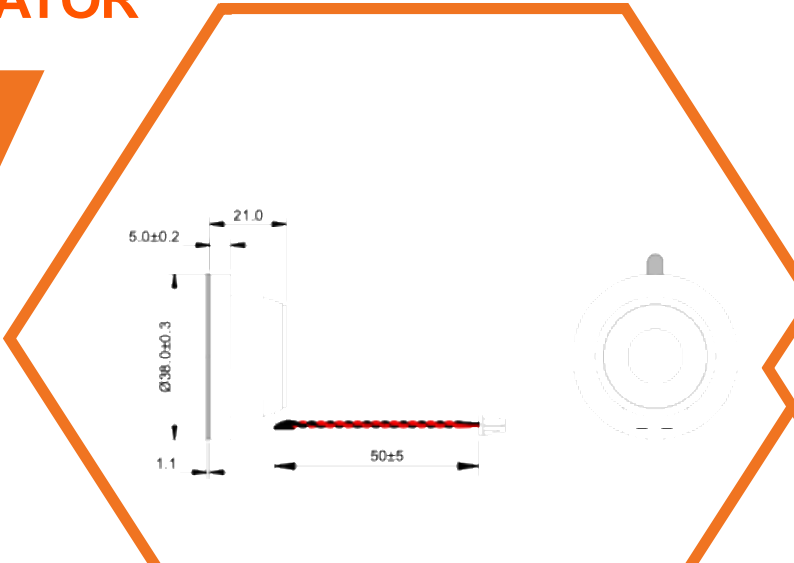

**Dimensions**  
 Unit : mm  
 Tolerance : ±0.3mm

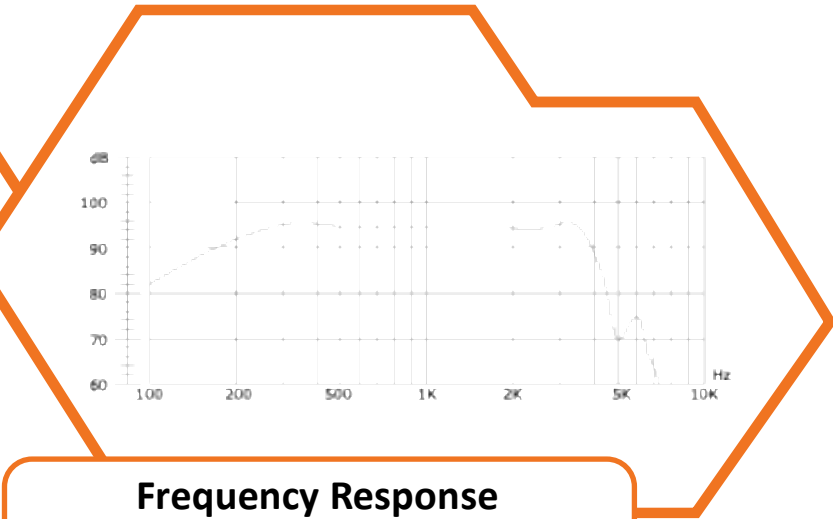

**Frequency Response**  
 Applied signal: 60mV, Sine Wave  
 Based on IEC-R318 standard

Specification (all data taken at 25°C unless otherwise specified)

Part Number	Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Frequency Range (Hz)	*Sound Pressure Level at 1KHz (dB)	Operating Temperature (°C)	Storage Temperature (°C)
HSR38A-150/1454	150 ± 15%	10	20	300 to 3400	97 ± 3	-20 to +60	-30 to +70

The specification are only for 150Ω version. Specification for other impedance is available upon request.

\*Value applied: 60mV input power, based on IEC-R318 standard.